

INT074 Halogen or Tungsten Softbox

ASSEMBLY INSTRUCTIONS

Parts list:

Qty	Description.
1	Connector ring
4	Frame rods
1	Outer cover
1	Internal diffuser 43 x 43cm (17 x 17ins)
1	Outer diffuser 60 x 60 cm (24 x 24ins)


To assemble the Softbox;

Take the outer cover and open the Velcro flaps on the rear edge to allow for easy assembly. After checking that the four frame rods are still threaded through the guide loops found on the inside corners of the cover.

Now take the metal connecting ring and fix one frame rod at a time tensioning them between the location holes in the outer rim of the connector ring and the pockets on each corner of the outside edge of the main cover. (see pictures) It is easier to fix the frame rods that are opposite to each other, so that each rod remains tensioned after it is fixed in place.

The internal diffuser can now be fixed using the Velcro pads on each of its corners. Now fit the main outer diffuser in place on the inner front edge of the cover, using the Velcro strip.

Seal the Velcro flaps on the rear of the outer cover around the connector ring and after removing the metal 'spill kill' unit in place of the reflector.

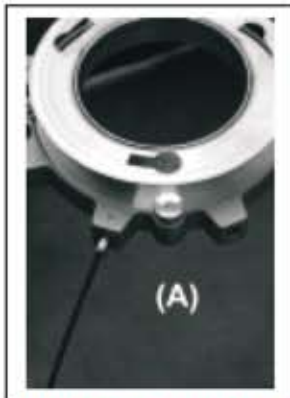

To fit the softbox onto the lighting head, remove the metal reflector from the light by loosening the fixing screw and rotating the reflector in an anti-clockwise direction. The softbox can then be clipped in place turning it in a clockwise direction to lock it in place. The fixing screw should then be tightened. The box can be rotated once in place by loosening the two knurled nuts (one of which is shown marked **(A)** in the picture).

When in use the ventilation flaps on each side of the softbox should be open to allow for the dissipation of the heat build up inside the softbox.

Interfit Photographic Limited
Unit 4 Cleton Business Park
Cleton Street
Tipton
West Midlands
DY4 7TR
UK
Telephone +44 121 522 4800